


SOLIDEAL COMPACTOR C1

CATALOGUE NUMBER	TYRE SIZE	PR	TUBE	VALVE	FLAP	RIM FITMENT (1)		TYRE DIMENSIONS MAX IN SERVICE (2) (± 2%)		INFLATION PRESSURE (± 15%) (bar)	LOAD CAPACITY (kg) (3)	
						REC	ALT	WIDTH (mm)	O. D. (mm)		10 km/h	15 km/h
8811533	7.50-15 NHS	6	700/750/815-15	TR75A	7.00/7.50/8.25-15	6.00	6.50	232	834	3.5	1730	1385
8811535	7.50-15 NHS	10	700/750/815-15	TR75A	7.00/7.50/8.25-15	6.00	6.50	232	834	6	2280	1824
8811536	7.50-15 NHS	12	700/750/815-15	TR75A	7.00/7.50/8.25-15	6.00	6.50	232	834	7.5	2615	2092
8811537	7.50-15 NHS	14	700/750/815-15	TR75A	7.00/7.50/8.25-15	6.00	6.50	232	834	8.5	2835	2268
8811553	8.50/90-15K	6	TBLS	-	-	6.00/6LB/6L	6.50	237	806	3.5	3900	3120
8811413	7.50-16 NHST	6				6.00	5.00F/5.50F	238	885			
8811423	10.50/80-16Y	6										
8811447	9.00-20Y	14				7.00	7.50	280	1046	7.5	4425	3540
8811478	11.00-20Y	16				8.00	8.50	317	1117	7.5	5445	4356

Y AVAILABLE 1999

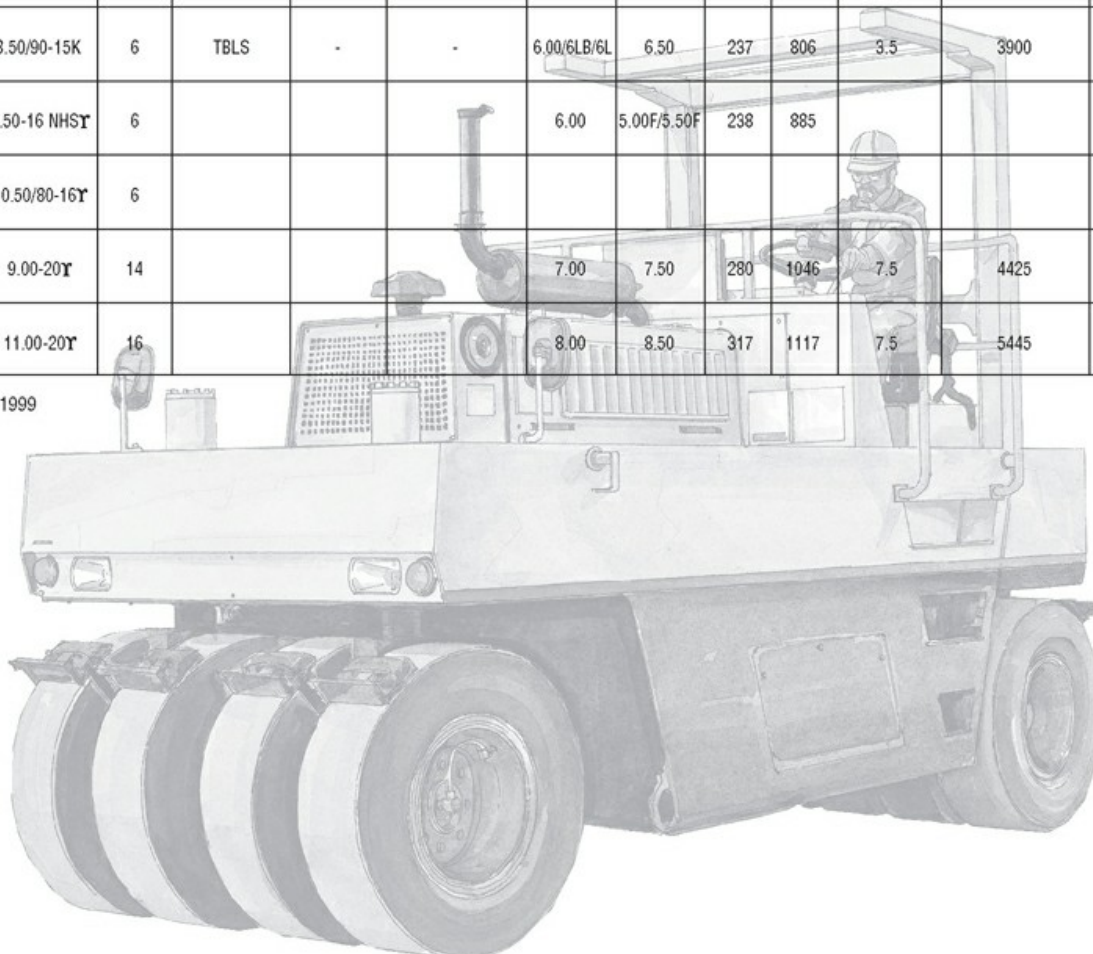

REMARKS

- (1) a) Due to high pressures specified for these tyres, the rim and wheel manufacturers must be consulted.
b) Rim dimensions are standardized by the Tire and Rim Association for size and contour only, and particular tyre and rim combinations are designated to assure proper mounting and fit of the tyre to the rim. The load and cold inflation pressure imposed on the rim and wheel must not exceed the rim and wheel manufacturers recommendation even though the tyre may be approved for a higher load or inflation pressure. Rims and wheels may be identified (stamped) with a maximum load and maximum cold inflating rating. For rims and wheels not so identified or for service conditions exceeding the rated capacities, consult the rim and wheel manufacturer to determine rim and wheel capacities for the intended service.
c) Safety warning - Use only properly adapted rims recommended by rim manufacturers for maximum psi - Tyre to rim assembly should be done by trained persons using the necessary precautions like locking restrainer and remote inflator.
Under/over inflation may result in tyre failure causing fatal bodily injury - Release air pressure fully before demounting tyre.
- (2) The sizes given are according to TRA, where available.
For exact sizes, please consult the technical department.
- (3) Loads are given for specific speeds and inflation pressure for compactor service at unlimited distance.

DISTRIBUTED BY